




SOUND ABSORPTION COEFFICIENT

Measured and evaluated according to ISO 354 and ISO 11654

Client: BAUX AB
Surface: BAUX Acoustic Wood Wool Tiles

Octave band (Hz)	Sound absorption coefficient (-)
63	
125	
250	
500	
1000	
2000	
4000	
α_w	0.30
NRC	0.00

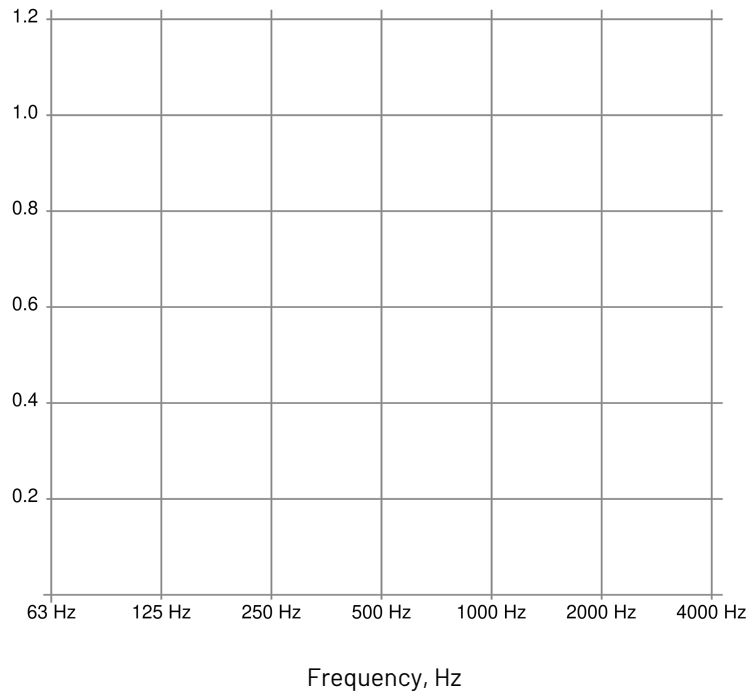

ORIGINAL TEST REPORT

Akustikverkstan report 16-066-M2

DATE OF REPORT

Akustikverkstan report 16-066-M2

